



How to use your—

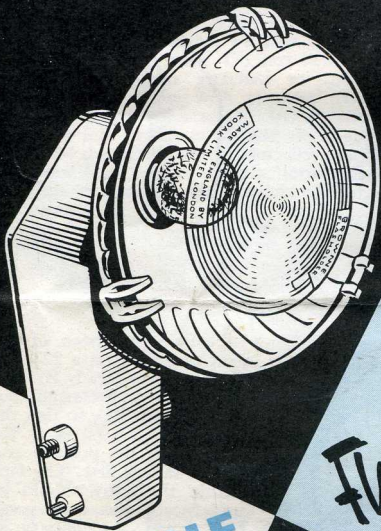

**BROWNIE**

**Flashholder**  
**3**


## Fitting the reflector

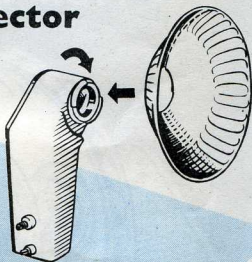

Engage the lugs of the Flashholder body and reflector as shown in the illustration. Twist the reflector clockwise to lock it.



## Fitting the battery

Undo the knurled locking screw on the back of the Flashholder and lift off the metal cover. Insert a 22½ volt battery (Ever-Ready B155 or equivalent is preferred, but B145 is suitable), so that the positive pole (+) is at the top. Insert the positive end of the battery first. The tape within the body should be underneath the battery, so that when the battery is exhausted it can be removed by lifting the end of the tape. Replace the metal cover and secure it by tightening the knurled locking screw.

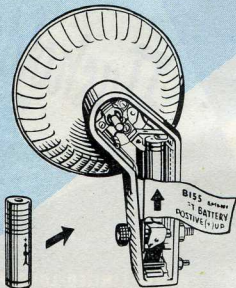

## Fitting the Flashholder

If desired, the 'Brownie' Flashholder 3 may be fitted and operated on some cameras without removing the camera from its ever-ready case. Do not insert flashbulb until Flashholder has been attached to the camera. This Flashholder is for use with cameras having the 'screw and pin' fitting illustrated. Insert the pin on the Flashholder into the lower of the two holes on the camera, then screw the captive screw into the upper hole on the camera. Electrical connections are made automatically.

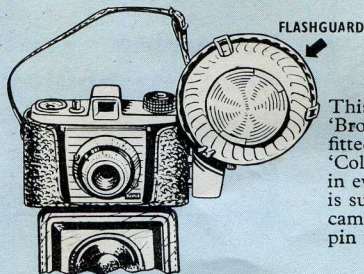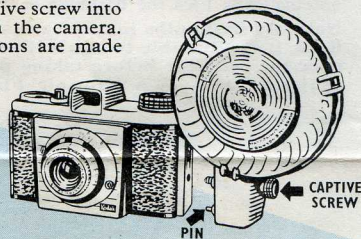


This picture shows the 'Brownie' Flashholder 3 fitted to the Bantam 'Colorsnap' 2 Camera in ever-ready case, but is suitable for all cameras with screw and pin fitting.

## Taking flash pictures

Use a capless flashbulb. It will only slide in with its copper wires making proper contact with the metal strips in the Flashholder. Push the bulb in firmly without attempting to twist it. Stand at the correct distance for the type of bulb in use. Full details are given in your camera instruction book. Pressing the exposure button on your camera automatically fires the flashbulb at the right instant.

**Note:** As flashbulbs may occasionally shatter when fired, it is advisable to clip a 'Brownie' Flashguard over the reflector before taking pictures. Ask your dealer to show you a 'Brownie' Flashguard.

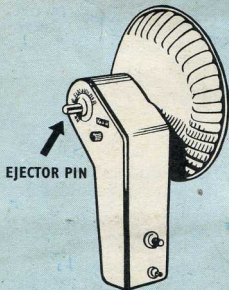

## Removing fired flashbulbs

Do not touch a newly-fired flashbulb immediately. It will be too hot. Push in the ejector pin at the rear of the reflector then unclip the Flashguard and allow the bulb to drop out.